

# Merfish Pipe & Supply

"Since 1920"

1211 Kress Street, Houston, TX 77020

P.O. Box 15879, Houston, TX 77220-5879

713.869.5731 - 800.869.5731

Sales Fax: 713.867.0738 General Fax: 713.867.0759

[WWW.MERFISH.COM](http://WWW.MERFISH.COM)

## PRODUCT LIST

### CARBON STEEL PIPE

WELDED	1/8" THROUGH 36"  ASTM A53, GRADES A & B, ASME ASTM A795 API 5L, GRADES B, X42, X52  SCHEDULE 10 THROUGH XH
SEAMLESS	1/8" THROUGH 16"  ASTM A106/A53 B, ASME API 5L, GRADES B, X42, X52  SCHEDULE 40 THROUGH XXH
FINISHES	BLACK, GALVANIZED, X-TRU COTE, SCOTCH-KOTE, TGF-3, BARE
END FINISHES	SQUARE CUT, BEVELED, GROOVED, THREADED
ORIGIN	DOMESTIC AND FOREIGN

### CARBON STEEL SEAMLESS WELD FITTINGS - ASTM A234 WPB


IMPORT - 1/2" THROUGH 36"  
STANDARD & XH WALLS

### FORGED CARBON STEEL FLANGES - ASTM A 105

IMPORT - 1/2" THROUGH 36"  
150# & 300#, STD & XH BORE

### SPECIAL SERVICES OFFERED

GROOVING, ROLLED & CUT  
CUTTING, THREADING  
COATING PER YOUR SPECIFICATION

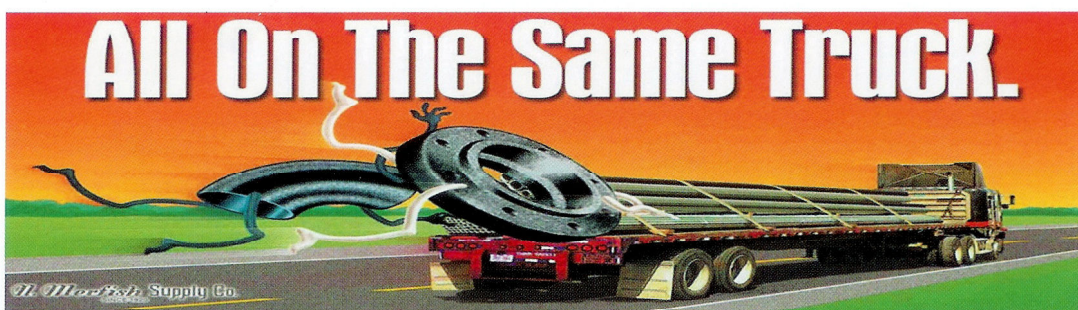

**SCHEDULE NUMBER**

Nominal Pipe Size NPS	O.D. Inches	Data	SCHEDULE NUMBER													
			10	N/S*	20	30	40	STD	60	80	XH	100	120	140	160	XXH
1/8	0.405	wall					0.068	0.068			0.095	0.095				
		# / ft					0.24	0.24			0.31	0.31				
1/4	0.540	wall					0.088	0.088			0.119	0.119				
		# / ft					0.43	0.43			0.54	0.54				
3/8	0.675	wall					0.091	0.091			0.126	0.126				
		# / ft					0.57	0.57			0.74	0.74				
1/2	0.840	wall					0.109	0.109			0.147	0.147			0.188	0.294
		# / ft					0.85	0.85			1.09	1.09			1.31	1.72
3/4	1.050	wall					0.113	0.113			0.154	0.154			0.219	0.308
		# / ft					1.13	1.13			1.48	1.48			1.95	2.44
1	1.315	wall					0.133	0.133			0.179	0.179			0.250	0.358
		# / ft					1.68	1.68			2.17	2.17			2.85	3.66
1 1/4	1.660	wall	0.109				0.140	0.140			0.191	0.191			0.250	0.382
		# / ft	1.81				2.27	2.27			3.00	3.00			3.77	5.22
1 1/2	1.900	wall	0.109				0.145	0.145			0.200	0.200			0.281	0.400
		# / ft	2.09				2.72	2.72			3.63	3.63			4.86	6.41
2	2.375	wall	0.109				0.154	0.154			0.218	0.218			0.344	0.436
		# / ft	2.64				3.66	3.66			5.03	5.03			7.47	9.04
2 1/2	2.875	wall	0.120				0.203	0.203			0.276	0.276			0.375	0.552
		# / ft	3.53				5.80	5.80			7.67	7.67			10.02	13.71
3	3.500	wall	0.120				0.216	0.216			0.300	0.300			0.438	0.600
		# / ft	4.34				7.58	7.58			10.26	10.26			14.34	18.60
3 1/2	4.000	wall	0.120				0.226	0.226			0.318	0.318				
		# / ft	4.98				9.12	9.12			12.52	12.52				
4	4.500	wall	0.120	0.188			0.237	0.237			0.337	0.337		0.438	0.531	0.674
		# / ft	5.62	8.67			10.80	10.80			15.00	15.00		19.02	22.53	27.57
5	5.563	wall	0.134				0.258	0.258			0.375	0.375		0.500	0.625	0.750
		# / ft	7.78				14.63	14.63			20.80	20.80		27.06	32.99	38.59
6	6.625	wall	0.134	0.188	0.250		0.280	0.280			0.432	0.432		0.562	0.719	0.864
		# / ft	9.30	12.94	17.04		18.99	18.99			28.60	28.60		36.43	45.39	53.21
8	8.625	wall	0.148	0.188	0.250	0.277	0.322	0.322	0.406	0.500	0.500	0.594	0.719	0.812	0.906	0.875
		# / ft	13.41	16.96	22.38	24.72	28.58	28.58	35.67	43.43	43.43	51.00	60.77	67.82	74.76	72.49
10	10.750	wall	0.165	0.188	0.250	0.307	0.365	0.365	0.500	0.594	0.500	0.719	0.844	1.000	1.125	1.000
		# / ft	18.67	21.23	28.06	34.27	40.52	40.52	54.79	64.49	54.79	77.10	89.38	104.23	115.75	104.23
12	12.750	wall	0.180	0.188	0.250	0.330	0.406	0.375	0.562	0.688	0.500	0.844	1.000	1.125	1.312	1.000
		# / ft	24.19	25.25	33.41	43.81	53.57	49.61	73.22	88.71	65.48	107.42	125.61	139.81	160.42	125.61
14	14.000	wall	0.250		0.312	0.375	0.438	0.375	0.594	0.750	0.500	0.938	1.094	1.250	1.406	
		# / ft	36.75		45.65	54.62	63.50	54.62	85.13	106.23	72.16	130.98	150.93	170.37	189.29	
16	16.000	wall	0.250		0.312	0.375	0.500	0.375	0.656	0.844	0.500	1.031	1.219	1.438	1.594	
		# / ft	42.09		52.32	62.64	82.85	62.64	107.60	136.74	82.85	164.98	192.61	223.85	245.48	
18	18.000	wall	0.250		0.312	0.438	0.562	0.375	0.750	0.938	0.500	1.156	1.375	1.562	1.781	
		# / ft	47.44		58.99	82.23	104.76	70.65	138.30	171.08	93.54	208.15	244.37	274.48	308.79	
20	20.000	wall	0.250		0.375	0.500	0.594	0.375	0.812	1.031	0.500	1.281	1.500	1.750	1.969	
		# / ft	52.78		78.67	104.23	123.23	78.67	166.56	209.06	104.23	256.34	296.65	341.41	379.53	
24	24.000	wall	0.250		0.375	0.562	0.688	0.375	0.969	1.219	0.500	1.531	1.812	2.062	2.344	
		# / ft	63.47		94.71	140.81	171.45	94.71	238.57	296.86	125.61	367.74	429.79	483.57	542.64	
30	30.000	wall	0.312		0.500			0.375			0.500					
		# / ft	99.02		157.68			118.76			157.68					
36	36.000	wall	0.312		0.500			0.375								
		# / ft	119.03		189.75			142.81								

\*N/S = Non Scheduled Pipe